


All dimensions are in millimeters  
Meets EIA-481A-2 and EIAJ-1009B

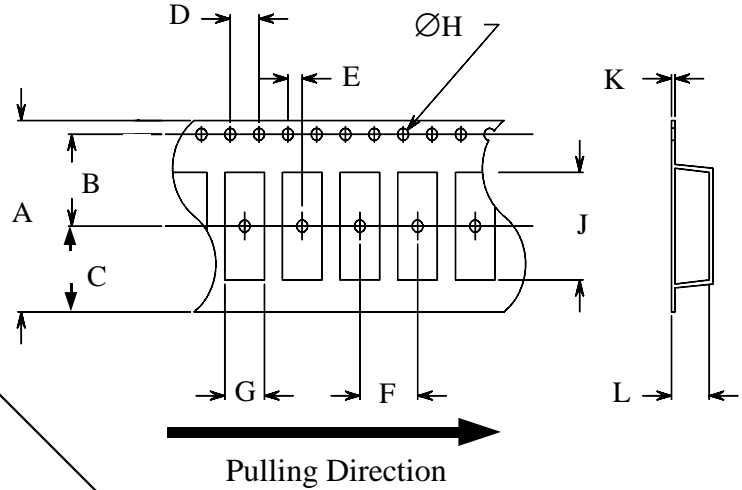

R: Width of Tape Slot  
S: Depth of Tape Slot.  
(Tape Slot in Core for Tape Start.)

**\* REEL SPECIFICATIONS \***

Series	A	B	C	D	E	F	G	H	J	K	L
F, FMT, F11, FMT11,L, M	16±.3	7.5±.2	6.75±.2	4±.2	2±.2	8±.2	5.4±.1	1.5±.1	7.9±.1	.3±.05	1.7±.1
SL	24±.3	11.5±.1	10.75±.1	4±.1	2±.1	12±.1	5.2±.1	1.5±.1	12.2±.1	.3±.1	2.9±.1
C, CS, CR	24±.3	11.5±.1	10.75±.1	4±.1	2±.1	12±.1		1.5±.1		.4±.1	4.8±.1

**\* REEL SPECIFICATIONS \***

Series	M	N	O	P	Q	R	S	T	U	V	Qty / Reel
F, FMT, F11, FMT11, L, M	1.5 min	50 min	20.2 min	13±.2	NA	2.5 min	10 min	22.4 max.	360 max.	16.4±.2	2000
SL	1.5 min	50 min	20.2 min	13±.2	40 min	2.5 min	10 min	30.4 max.	360 max.	24.4±.2	1000
C, CS, CR	1.5 min	50 min	20.2 min	13±.2	40 min	2.5 min	10 min	30.4 max.	360 max.	24.4±.2	1000